


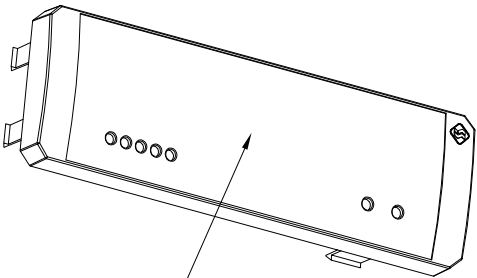
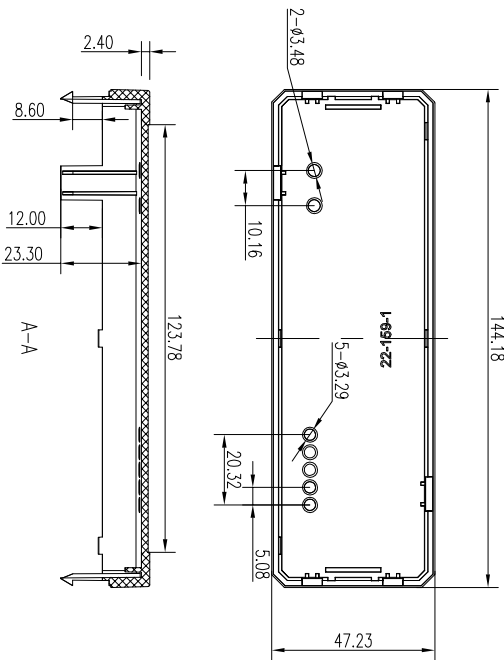


1		2						3			
		GB/T 1804 尺寸分段									
公差等级		>0.5~3	>3~6	>6~30	>30~120	>120~400	>400~1000	1000~2000	2000~4000		
f (精密级)		±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-		
m (中等级)		±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2		
c (粗等级)		±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4		
尺寸分段		公差值									
0~5		±0.1									
>5~20		±0.15									
>20~50		±0.2									
>50~100		±0.25									
>100~200		±0.3									
>200		±0.5									
角度		±0.5°									



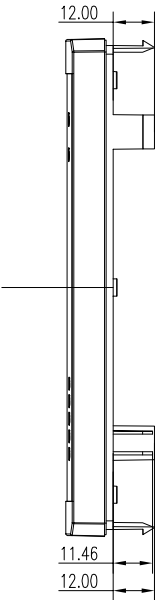

模穴：一出一

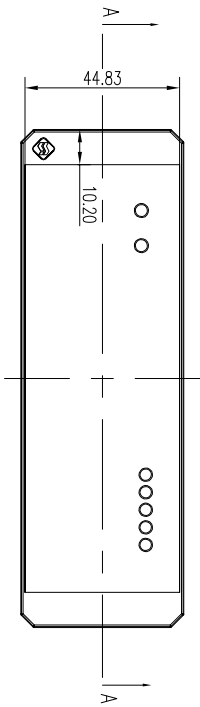

- 技术要求:
- 1、材料按客户要求定;
 - 2、注塑产品无料料、无拉白、无毛边;
 - 3、表面处理按照22-158的表面处理来做;
 - 4、未注尺寸见3D;
 - 5、未注公差按GB/T1804-m级。

制 图	审 核	批 准	客户名称	材 料	PC+ABS
Drawing	Auditing	Confirm	Custom Name	Material	
			产品名称	图纸比例	A3
			Product Name	Drawing Scale	
			产品编号	视 图	
			Product Code	Project View	
			22-159-1		
共 页 第 页			中国·宁波慈溪		
			TEL:+8657163226910		
			FAX:+8657163226900		



宁波三和壳体有限公司
NINGBO SANHE ENCLOSURE CORPORATION

