

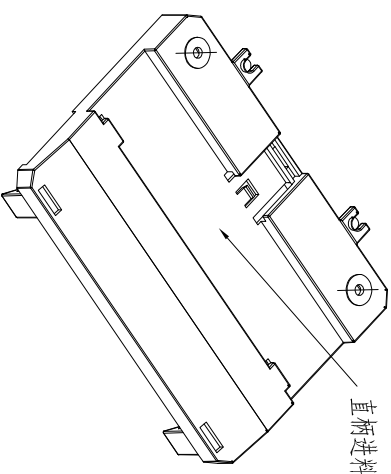

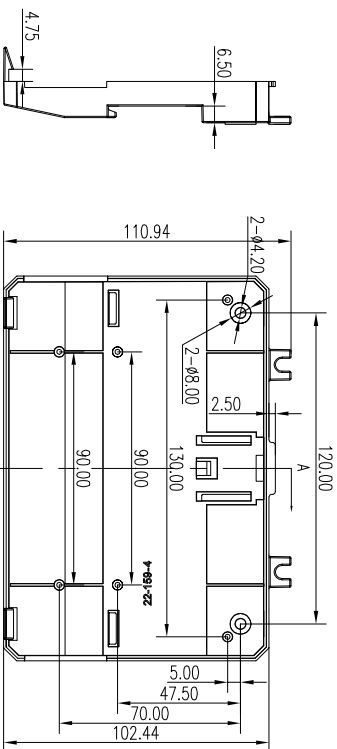
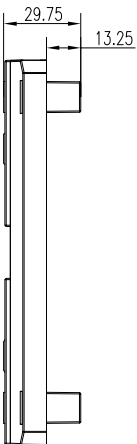


1	GB/T 1804 尺寸分段						3
公差等级	>0.5~3	>3~6	>6~30	>30~120	>120~400	>400~1000>1000~2000>2000~4000	
f (精密级)	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5
m (中等级)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
c (粗糙级)	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3
尺寸分段	公差值						
0~5	±0.1						
>5~20	±0.15						
>20~50	±0.2						
>50~100	±0.25						
>100~200	±0.3						
>200	±0.5						
角度	±0.5°						

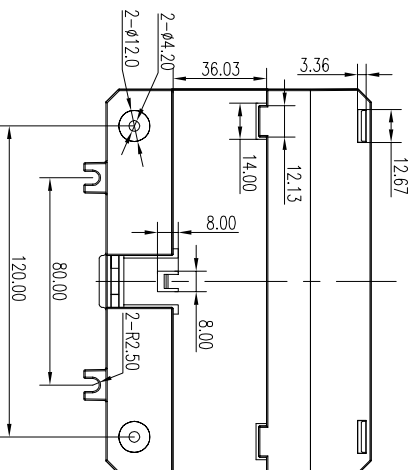

模穴：一出一

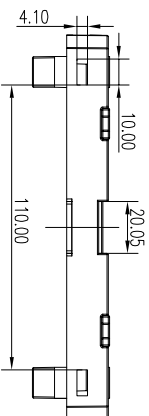

技术要求:

- 1、材料按客户要求;
- 2、注塑产品无缺料、无拉白、无毛边;
- 3、表面处理按照2-158的表面处理来做;
- 4、未注尺寸见3D;
- 5、未注公差按GB/T1804—H级。

制 图	审 核	批 准	客户名称	材 料	PC+ABS
Drawing	Auditing	Confirm	Custom Name	Material	
			产品名称	图纸比例	A3
			Product Name	Drawing Scale	
			产品编号	视 图	
			Product Code	Project View	
			22-159-4		
共 页	第 页	页	中国·宁波慈溪		
			NINGBO SANHE ENGLOSURE CORPORATION		
			TEL: +86(571)63226910		
			FAX: +86(571)63226900		